

26GHz Radar Level Meter

Product Manual

Model: 8260H



Directory

1、Product Overview.....	1
2、Product Introduction.....	2
3、The Installation Requirements.....	2
4、The Electrical Connection.....	4
5、Instrument Commissioning.....	7
6、Structure Size.....	9
7、Technical Parameters.....	10
8、Meter Linearity.....	11
9、Product Model Selection.....	11


26GHz Radar Level Meter

1. Product Overview

This series of radar level meter adopted 26G high frequency radar sensor, the maximum measurement range can reach up to 10 meters. Antenna is optimized further processing, the new fast microprocessors have higher speed and efficiency can be done signal analysis, the instrumentation can be used for reactor, solid silo and very complex measurement environment.

● Principle

Radar level transmitter antenna microwave pulse is narrow, the downward transmission antenna. Microwave exposure to the medium surface is reflected back again by the antenna system receives, sends the signal to the electronic circuit automatically converted into level signals (because the microwave propagation speed, electromagnetic wave to reach the target and the reflected back to the receiver this time is almost instantaneous).

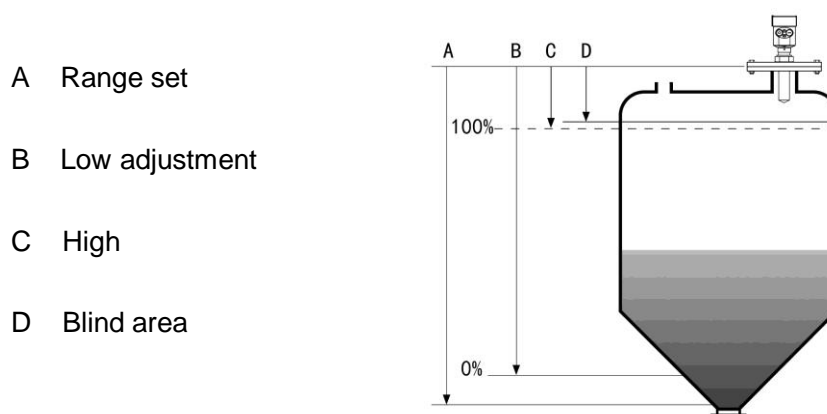

Datum measurement: Screw thread bottom or the sealing surface of the flange.

Note: Make sure the radar level meter the highest level cannot enter the measuring blind area (Figure D shown below).

● The characteristics of 26G radar level meter:

- Small antenna size, easy to install; Non-contact radar, no wear, no pollution.
- Almost no corrosion, bubble effect; almost not affected by water vapor in the atmosphere, the temperature and pressure changes.
- Serious dust environment on the high level meter work has little effect.
- A shorter wavelength, the reflection of solid surface inclination is better.
- Beam angle is small, the energy is concentrated, can enhance the ability of echo and to avoid interference.
- The measuring range is smaller, for a measurement will yield good results.
- High signal-to-noise ratio, the level fluctuation state can obtain better performance.
- High frequency, measurement of solid and low dielectric constant of the best choice.

2. Product Introduction

8260H



Application: All kinds of corrosive liquid
Measuring Range: 10 meters
Process Connection: Thread, Flange
Process Temperature: $-40^{\circ}\text{C} \sim 130^{\circ}\text{C}$
Process Pressure: $-0.1 \sim 0.3 \text{ MPa}$
Accuracy: $\pm 5\text{mm}$
Protection Grade: IP67
Frequency Range: 26GHz
Supply: 2-wire (DC24V) / 4-wire (DC24V / AC220V)
Signal Output: 4... 20mA / HART (2-wire / 4-wire)
RS485/ Modbus
Outer Covering: Aluminum / Plastic / Stainless steel
Explosion-proof Grade: Exia II C T6 Ga/ Exd II C T6 Gb

3. The Installation Requirements



● Installation guide:

The 8260H radar level gauge can be mounted using a threaded connection and flange connection, typically used for the measurement of corrosive liquids in smaller tanks. The instrument is installed at 1/4 or 1/6 of the diameter and the PTFE rod is to be inserted into the measuring tank.


Note: The minimum distance from the tank wall should be 300mm.

Note: ① datum

② The container center or axis of symmetry

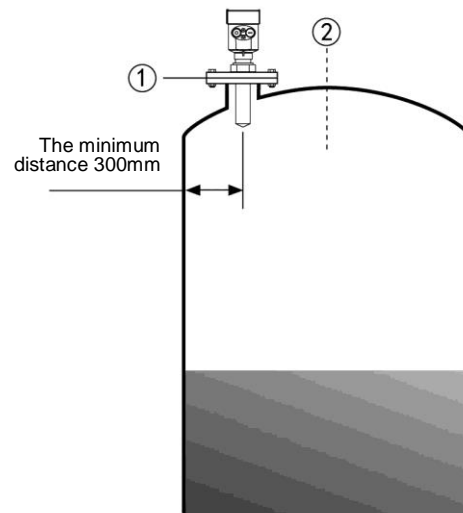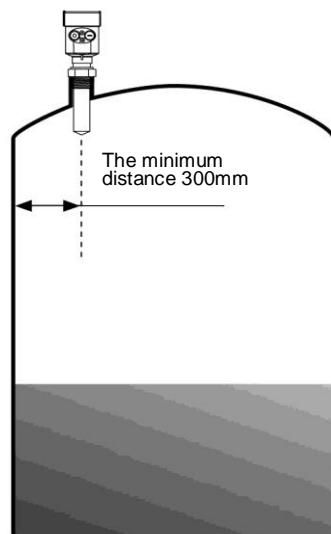

- The top conical tank level, can be installed at the top of the tank is intermediate, can guarantee the measurement to the conical bottom.

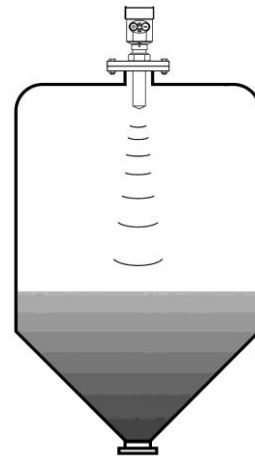


- **Typical installation errors:**

- Conical tank cannot be installed above the feed port.


Note: outdoor installation should adopt sunshade.

- ① Correct
- ② Error rainproof measures

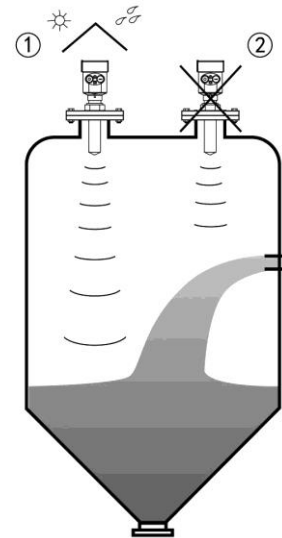

- The instrument cannot be installed in the arched or domed roof intermediate. In addition to produce indirect echo is also affected by the echoes. Multiple echo can be larger than the real value of signal echo, because through the top can concentrate multiple echo. So cannot be installed in a central location.


- ① Correct
- ② Error

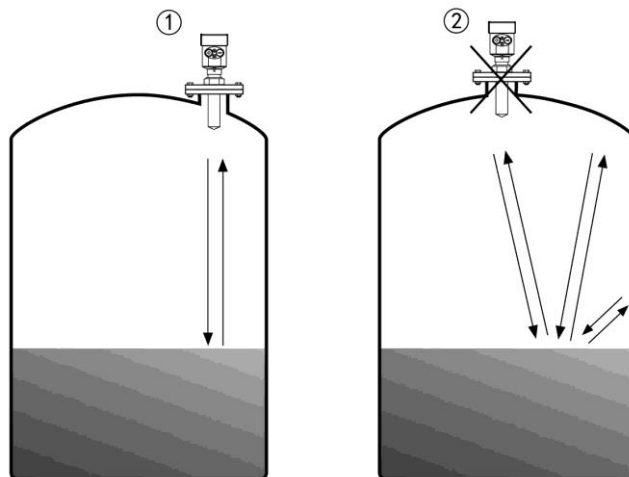

- There are obstacles affecting measurement needed reflection plate.


① Correct

② Error

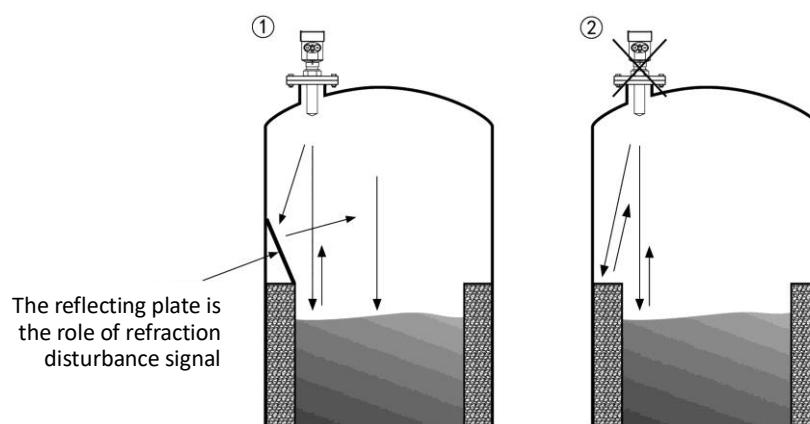

● Height of nozzle:

Antenna extends into the tank at least 10mm distance.

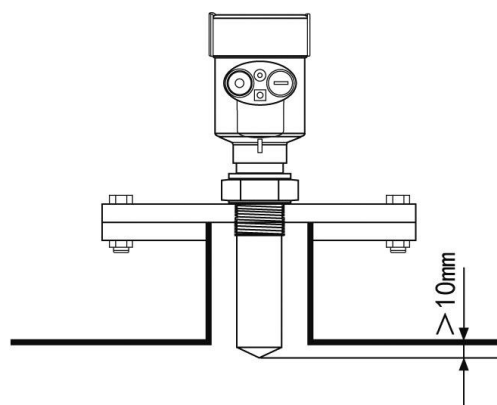

4. The Electrical Connection

● The power supply voltage:

(4~20)mA/HART (Two wire system)

The power supply and the output current signal sharing a two core shield cable. The supply voltage range see technical data. For intrinsically safe type must be a safety barrier between the power supply and the instrument.

(4~20)mA/HART(Four wire system)

Separate power supply and the current signal, respectively using a two-core shielded cable. The supply voltage range see technical data.


RS485 / Modbus

Power supply and Modbus signal line separated


respectively using a two-core shielded cable, the power supply voltage range see technical data.

- **Connection mode:**

- 24V two wire wiring diagram as follows:

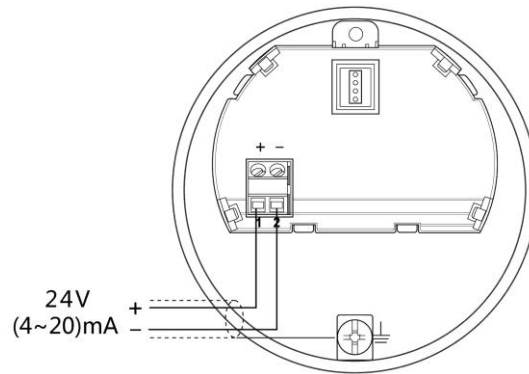

- 6~24V RS485/Modbus wiring diagram as follows:

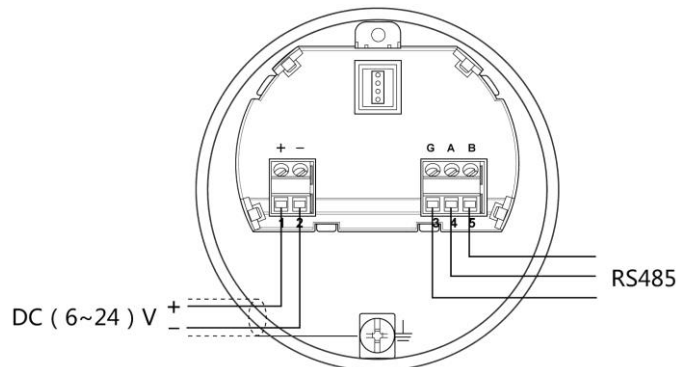


- **Explosion Proof Connection**

The intrinsic safety version sensors (Exia IIc T6) use Alu-die casting housing and filling Silicone rubber sealants internal structure aimed to prevent sparks resulted from circuit failure from leaking out. It is applicable for the continuous level measurement of flammable medium under Exia IIc T6.


A safety barrier FBS-2 must be used together with the intrinsic safety instrument. It is an associated device to this product for the power supply of this product. The main specification is intrinsic safety: Exia IIC, voltage of power supply: 24V DC $\pm 5\%$, short-circuit current: 135mA, operating current: 4...20mA.

All cables must be shielded. The max length is 500m for the cable from the barrier to the sensor. Stray capacitor $\leq 0.1 \mu F/Km$, stray inductance 1mH/Km. Instrument must be

connected to the ground potential. Any unapproved associated device is not allowed to be used.

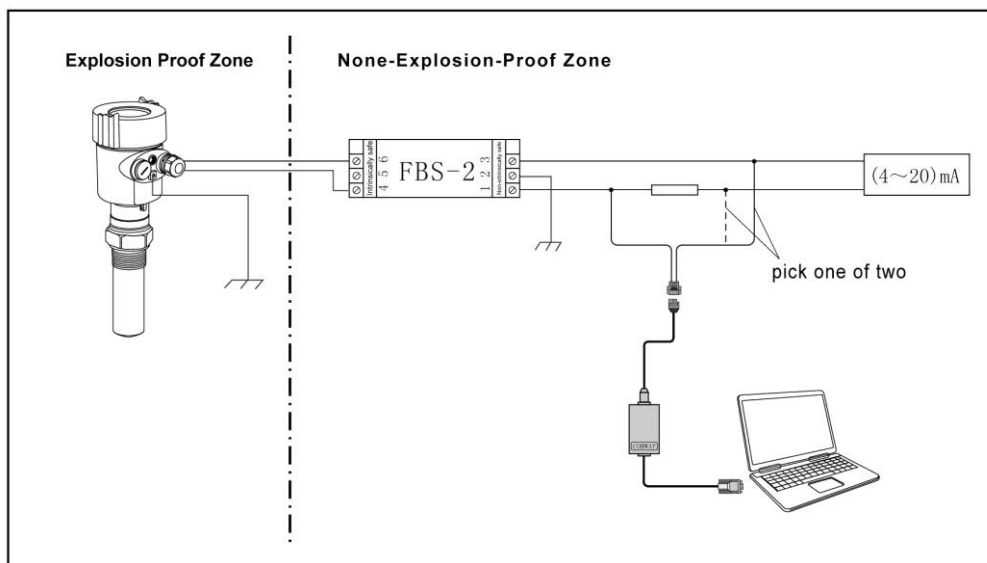

Adjustment with Software

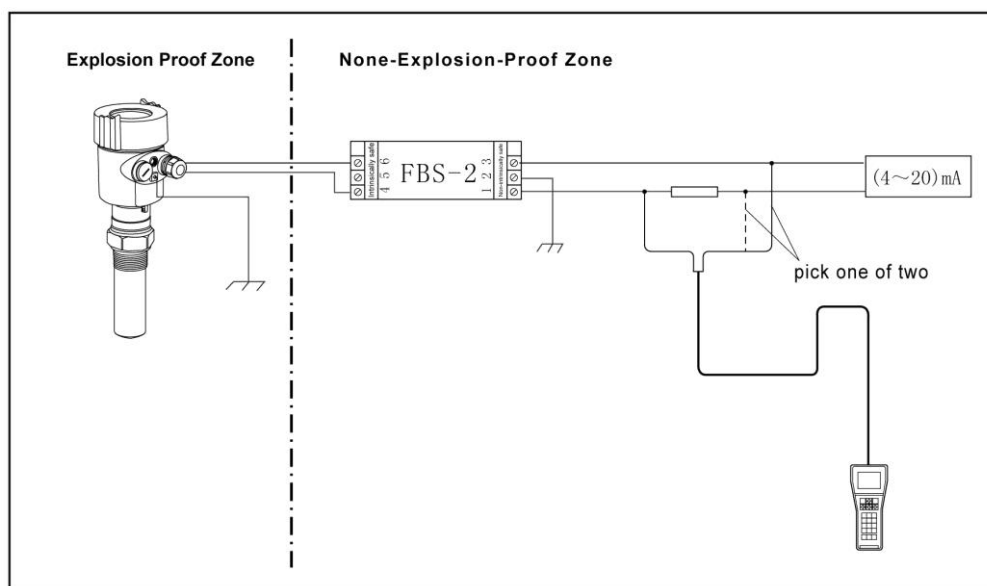

Adjustment with HART Handheld Programmer

- **Safety instructions:**


- Please observe the local electrical code requirements!
- Please comply with local requirements for personnel health and safety regulations.
All electrical components of instrument operation must be completed by the formal training of professionals.
- Please check the instrument nameplate to provide product specifications meet your

requirements. Please make sure that the power supply voltage and instrument nameplate on the requirements.

- **Protection grade:**

This instrument meets the protection class IP66/67 requirements, please ensure the waterproof cable sealing head. The following diagram:

:

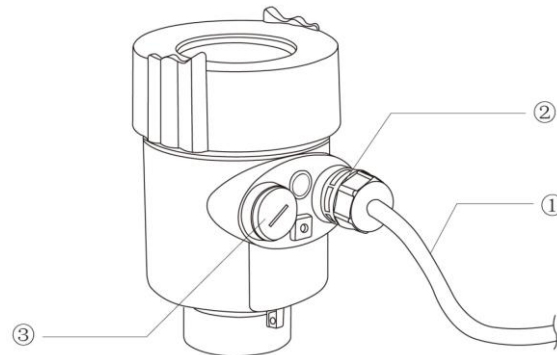

How to install to meet the requirements of IP67:

Please make sure that the sealing head is not damaged.

Please make sure that the cable is not damaged.

Please make sure that the cable for use with electrical connection specification.

Cable into the electrical interface before its curved downward, ensure that the water will not flow into the shell, see the ①

Tighten the cable seal head, see the ②

Please electrical interface will not use blind plug tight, see the ③

5. Instrument Commissioning

- **There are three kinds of debugging method:**


- 1) Display / Keyboard
- 2) Host debugging
- 3) HART handheld programmer

- **Display / Keyboard:**

Please debug the instrumentation by four buttons on the display screen. There are three debug menu languages optional. After debugging is generally used only for display, through the glass window can read measured value very clearly.

① Liquid crystal display(LCD)

② The key

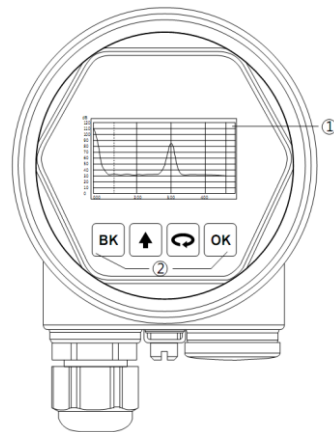

● **PC debugging:**


Connected to PC by HART

① RS232 interface or USB interface

② Radar level meter

③ HART adapter

④ 250 Ω resistor

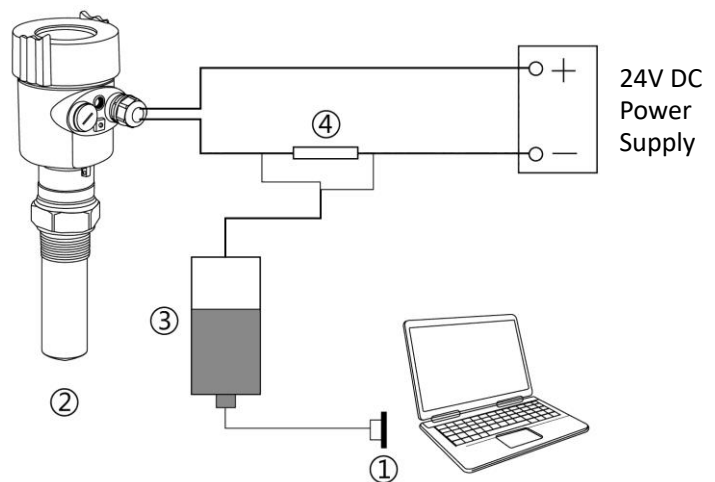


● **HART handheld programmer:**

① HART handheld programmer


② Radar level meter

③ 250 Ω resistor

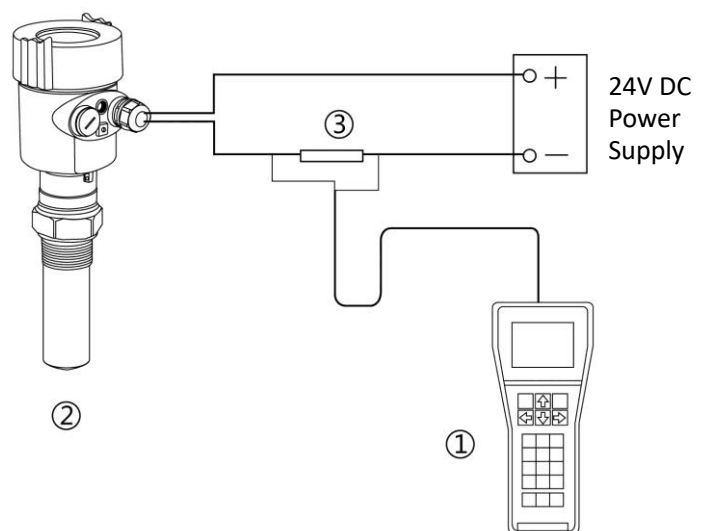


6. Structure Size (Unit: mm)

- The outer shell:

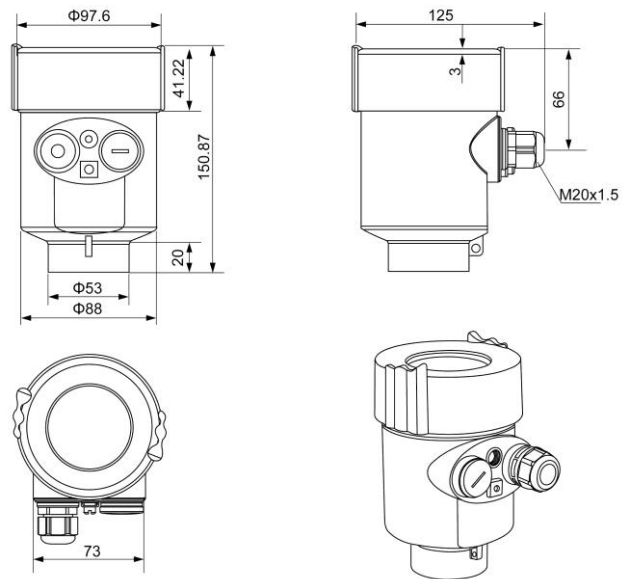


- Appearance size:

8062H

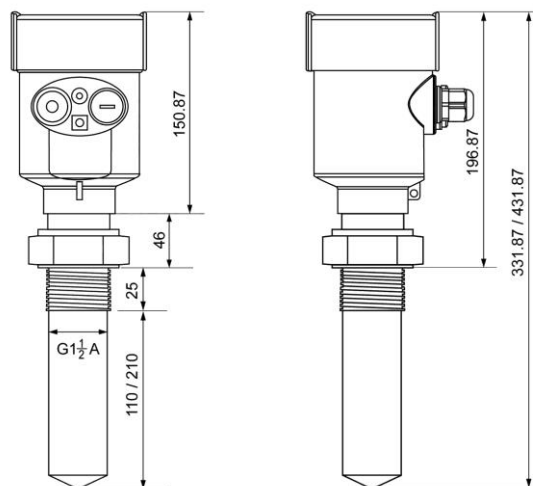

- Flange type:

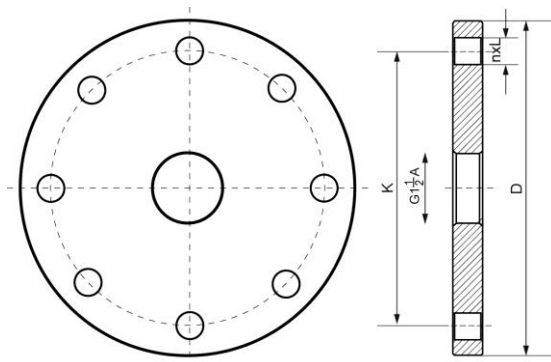

Flange Selection Tables				
Specification	Outer diameter D	Hole center distance K	Number of Holes n	Hole diameter L
DN50	Φ165	Φ125	4	18
DN80	Φ200	Φ160	8	18
DN100	Φ220	Φ180	8	18
DN125	Φ250	Φ210	8	18
DN150	Φ285	Φ240	8	22
DN200	Φ340	Φ295	12	22
DN250	Φ405	Φ355	12	26

7. Technical Parameters


Process Connection	Thread G1½" A / Thread 1½" NPT / Flange		
Antenna Material	Stainless Steel / PTFE		
The outer shell			
The seal between the shell and the shell cover	Silicone rubber		
Casing window	Polycarbonate		
The ground terminal	Stainless steel		
The power supply voltage			
Two wire system			
	The standard type	(16 ~ 26) V DC	
	Intrinsically safe	(21.6 ~ 26.4) V DC	
	Power dissipation	max 22.5mA / 1W	
	Allowable ripple		
	- <100Hz	Uss<IV	
	- (100~100K) Hz	Uss<10mV	
Flameproof	(22.8 ~ 26.4) V DC	2-wire system	
	(198 ~242)V AC	4-wire system / 110V AC	4-wire system
The cable parameters			
Cable entrance / plug	1 M20xl.5 cable entrance		
	1 blind plug		
Terminal	Conductor cross section 2.5mm²		
Output parameters			
The output signal	(4 ~ 20) mA/RS485		
Communication protocol	HART		
Resolution	1.6 μ A		
Fault signal	Constant current output; 20. 5mA		
	22mA		
	3.9mA		
The integral time	(0 ~ 36) s, adjustable		
Blind area	the ends of the antenna		
The maximum distance measurement			
	8062H	10 meters	(Liquid type)
Microwave frequency	26GHz		
Communication interface	HART communication protocol		
The measurement interval	about 1 second (depending on the parameter settings)		
Adjust the time	about 1 second (depending on the parameter settings)		
Display resolution	1 mm		
Working storage and transportation temperature	(-40~100)		
Process temperature (the temperature of the antenna part)	(40~130)℃		
Pressure	Max.4MPa		
Seismic	Mechanical vibration 10m/s², (10 ~ 150) Hz		

8. Meter Linearity

901

Emission angle 20°

Precision See chart

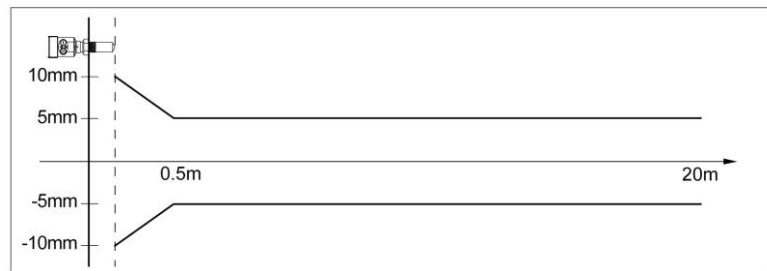

9. Product Model Selection

● 8062H

License

- P Standard (Non-explosion-proof)
- I Intrinsically safe (Exia IIC T6 Ga)
- G Flameproof (Exd IIC T6 Gb)

Antenna Type / Material / Temperature

F Sealing horn / PTEE / -40... 130 °C

Process Connection / Material

- G Thread G1½" A
- N Thread 1½" NPT
- A Flange DN50 /PP
- B Flange DN80 /PP
- C Flange DN100 /PP
- Y Special custom

The Outlet Pipe Length of the Container

- A Outlet pipe 100mm
- B Outlet pipe 200mm

The Electronic Unit

- 3 (4~20) mA / 24V DC / HART two wire system
- 4 (4~20) mA / 220V AC / HART four wire system
- 5 RS485 Modbus / 6~24V four wire system

Outer Covering / Protection Grade

- L Aluminum / Single cavity / IP67
- H Aluminum / Double cavity / IP67
- G Plastic / Single cavity / IP65
- K Stainless steel / Single cavity / IP67

Cable Line

- M M 20x1.5
- N ½" NPT

Field Display/The Programmer

- A With
- X Without